


# DTC Series Eco-Lite Jobsite Fixture

Dimensions	Fixture Length	Fixture Width	Approx. Ship Wt.
DTC Series	24.5"	9.25"	24 LBS.

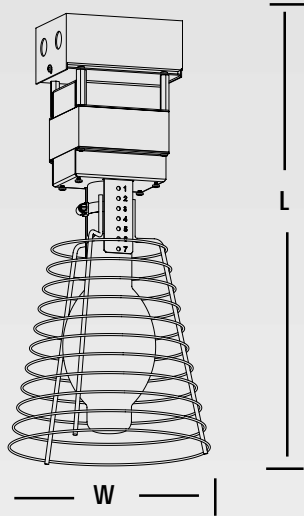

The DTC Series Eco-Lite fixture replaces approximately two or three strings of temporary lights and can be converted to a permanent standard high bay/low bay with the addition of the desired optical assembly.

### Ballast

The unique ballast mounting allows most of the heat to be generated into the air while the capacitor is housed in a separate compartment with an air barrier between the ballast and capacitor.

### Mounting

3/4" conduit mount is standard. An optional hook, cord and plug is also available.

### Lamps

Metal halide luminaires are available in 400W only.

### Lamp Shield

The strong and plated steel cage shields the lamp from damage while allowing light distribution for a full 360°.

### Packaging

The DTC Series fixtures are packaged in a Distributor-Pak™ for ease of inventory & shipping, when specified.

### Labels

The DTC Series is UL listed for damp locations and retains its UL listing with its conversion to a standard high or low bay optical assembly.

### Warranty

The DTC Eco-Lite sold by C.E.W. Lighting, Inc., unless otherwise specified, will be warranted to be free of defects in materials and workmanship under normal use and service for a period of five (5) years from date of shipment. If found to be defective by us, we will replace the non-performing parts or goods.

### OSHA

The DTC Eco-Lite conforms to OSHA standards for light levels.



55°C, 65°C Ambient Rated



LISTED FOR DAMP LOCATIONS  
CONSULT FACTORY FOR CUL AVAILABILITY

I.E.S. photometrics available by e-mail or on disk

## DTC Eco-Lite


Cat #: DTC2440

Lamp: 400W Clear MH

Lumens: 38,000

Certified Test Report: B2013

IES File: DTC440.IES

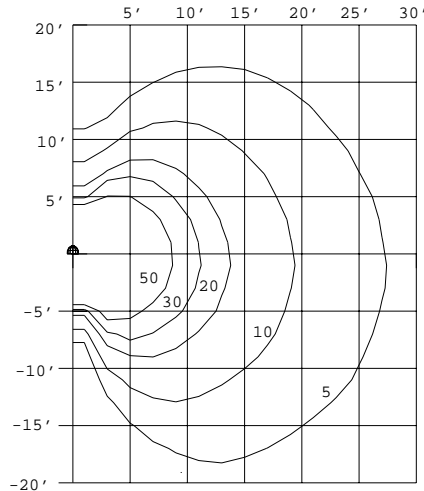

*New –Easy to Ship–  
Distributor-Pak™*



To build catalog numbers refer to inside front cover

# DTC Series Eco-Lite Jobsite Fixture

Wattage Range:  
400W

DTC Series Order Information			
Catalog Number			
Housing Size	Wattage Lamp	Conduit Mount	Hook, Cord, Plug
11"	400W MH	DTC0440-(a)(b)	DTC2440-(a)(b)
	Distributor Pak™	DTC0440@(a)(b)	DTC2440@(a)(b)

(a) Voltage Suffix Key: Indicate voltage in space (a)

Description	120 Volt	120 Volt	277 Volt	208 Volt	240 Volt	480 Volt	Multi-tap
	1	S1	2	3	4	5	M
	(Twist Lock)	(Straight Blade)					tapped @ 277V

(b) Options: Indicate options in space (b) (Factory Installed)

Description	SUFFIX (b)
Coated Lamp	C
Hook Only	HKSC
<b>Replacement Guard</b>	
Cylindrical Guard with Adjustable Top Steel Clamp	LG

Lamp Included

