



GLX Series 12" Garage Lighter



Dimensions	Fixture Refractor	Fixture Height	Fixture Diameter	Approx. Ship Wt.
GLX Series	11"	12"	12.7"	15 LBS.

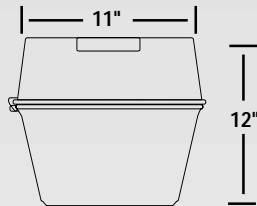

Top View



Only 12" high, the GLX Series Garage Lighter is small in size and delivers maximum light distribution from its acrylic refractor. Designed for the low profile needs of parking garages, it is the perfect security fixture.

Optics

The strong acrylic prismatic refractor delivers light consistently in a 360° pattern and its vertical burn lamp provides maximum light output. The extra thick non-yellowing acrylic lens resists the abuse typical of parking facilities. The 175W metal halide lens is high temperature acrylic.

Ballast

The ballast is a high power factor, high reactance ballast and prewired to your voltage specification. Available in 120/208/240/277 and 480 volts. 175W is CWA Multi-tap metal halide.

Lamps

The GLX Series Garage Light is available in 175W metal halide, 50W - 175W Pulse Start metal halide and 50W-150W HPS lamp types (mogul base only).

Mounting

The exclusive adjustable slide box mounts directly to 3/4" threaded conduit or a standard 4" round box and allows the GLX Series fixture to be safely disconnected from the junction box, making maintenance and/or replacement both quick and easy.

Finish

The bronze steel housing has a powder coat finish that resists corrosion and the dirt and oil compounds normally found in parking garages.

Labels

The GLX Series is UL Listed for damp locations.

Warranty


The GLX Garage Lighter sold by C.E.W. Lighting, Inc., unless otherwise specified, will be warranted to be free of defects in materials and workmanship under normal use and service for a period of two (2) years from date of shipment. If found to be defective by us, we will replace the non-performing components.

55°C Ambient Rated



LISTED FOR DAMP LOCATIONS
CONSULT FACTORY FOR CUL AVAILABILITY

I.E.S. photometrics available by e-mail or on disk

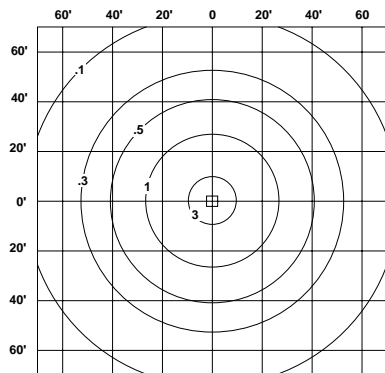

150W HPS GLX Series at 15' mounting height.

12" PRISMATIC PHOTOMETRIC DATA

Curve #: 36-123-01

Lamp: High Pressure Sodium


Wattage: 150W

Lumens: 16,000

Lens: Acrylic

IES Distribution

Type II (narrow)

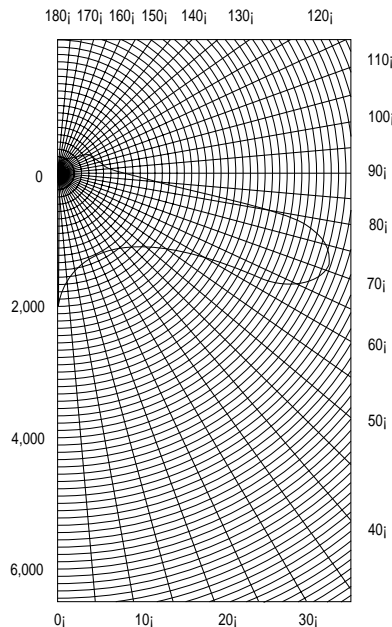

EFFICIENCY = 85%

SC = 2.0



To build catalog numbers refer to inside front cover

GLX Series Order Information

GLX Series 12" Garage Lighter

Wattage Range:
50-175W



Lamp Included

Housing Size	Wattage Lamp	Catalog Number		
		Slide Box	Hook, Cord & Plug	Quick Disconnect*
12"	175W MH	GLX0417-(a)(b)	GLX2417-(a)(b)	GLX3417-(a)(b)*
ESS	50W MH/PS	GLX0805-(a)(b)	GLX2805-(a)(b)	GLX3805-(a)(b)*
ESS	70W MH/PS	GLX0807-(a)(b)	GLX2807-(a)(b)	GLX3807-(a)(b)*
ESS	100W MH/PS	GLX0810-(a)(b)	GLX2810-(a)(b)	GLX3810-(a)(b)*
ESS	150W MH/PS	GLX0815-(a)(b)	GLX2815-(a)(b)	GLX3815-(a)(b)*
ESS	175W MH/PS	GLX0817-(a)(b)	GLX2817-(a)(b)	GLX3817-(a)(b)*
	50W HPS	GLX0505-(a)(b)	GLX2505-(a)(b)	GLX3505-(a)(b)*
	70W HPS	GLX0507-(a)(b)	GLX2507-(a)(b)	GLX3507-(a)(b)*
	100W HPS	GLX0510-(a)(b)	GLX2510-(a)(b)	GLX3510-(a)(b)*
	150W HPS	GLX0515-(a)(b)	GLX2515-(a)(b)	GLX3515-(a)(b)*

* Quick Disconnect Available Spring 2003

(a) Voltage Suffix Key: Indicate voltage in space (a)

Description	120 Volt*	277 Volt*	208 Volt*	240 Volt*	480 Volt	Multi-tap(277V)
	1	2	3	4	5	M

* With Quick Disconnect Available Spring 2003

(b) Options: Indicate options in space (b) (Factory Installed)

Description	SUFFIX
	(b)
High-2-Low (175W MH Only)tt	H
Quartz Restrike (100-175W only)	Q
Bronze Housing	BZ
White Housing	WT

Accessories: (Field Installed)

Description	SUFFIX
	(b)
Pendant Mount 6" (other lengths available upon request)	PM
Hook	HKSC

tt Must be used with components on pgs. 136-139

Mountings



Slide Box On
Fixture Top



Hook, Cord &
Plug

Accessories



Pendant Mount
(1/2" X 6"rigid)