

SSL Series - Remote Directional Floodlight



Wattage Range:
1000-1500W

55°, 65° Ambient Rated LISTED FOR WET LOCATIONS
CONSULT FACTORY FOR CUL AVAILABILITY

I.E.S. photometrics available by e-mail or on disk


To build catalog numbers refer to inside front cover

Remote Directional Floodlight Order Information

Housing Size (sq.)	Wattage Lamp	Catalog Number	
		(add mounting code)	Mounting Code (Insert Code at * in Cat. #)
20"	1000W MH	SSL-1000M (No Ballast Housing)	0 = Hard Wire
	1000W HPS	SSL-1000H (No Ballast Housing)	
	1500W MH	SSL-1500M (No Ballast Housing)	

Remote Ballast Housing Available on Pages 164-165.

Dimensions	Fixture Height	Fixture Width	Fixture Depth	Approx. Ship Wt.
SSL Series No Ballast	23"	20"	18.75"	20 LBS.

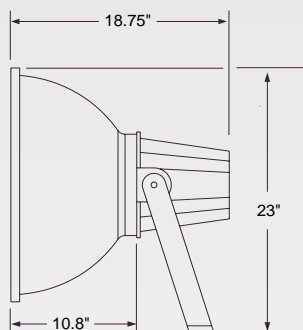

(a) Voltage Suffix Key: Indicate voltage in space (a)

Description	120 Volt	277 Volt	208 Volt	240 Volt	480 Volt	Multi-tap
	1	2	3	4	5	M
	tapped @ 277V					

(b) Options: Indicate options in space (b) (Factory Installed)

Description	SUFFIX (b)
Cross Arm Mount	CA
Tenon Mount	SSL-TM
Lamp Support (Comes Standard with Fixture)	LS

EPA Rating – 2.39

Housing

The die cast aluminum housing is fully gasketed for a weather tight outdoor floodlight. All fasteners are stainless steel and chemically treated (galvanized) to prevent corrosion. Each fixture is painted a semi-matte black - high temperature powder coat.

Optics

The reflectors are precision spun aluminum, anodized and chemically brightened. Type 6 distribution.

Lens

The polished 5/32" strengthened, tempered safety glass.

Lamps

The SSL Series is available with a 1000W Metal Halide, 1000W High Pressure Sodium lamp or a 1500W Metal Halide lamp.

Mounting Technical Specifications

Trunnion Mount: 3/16" steel, hot dip galvanized – 9/16 mounting hole.

Aiming Mechanism: Indicator for accurate vertical aiming (-45° to +85° range recommended)

Warranty


The SSL Remote Directional Floodlight sold by C.E.W. Lighting, Inc., unless otherwise specified, will be warranted to be free of defects in materials and workmanship under normal use and service for a period of five (5) years from date of shipment. If found to be defective by us, we will replace the non-performing components.

Mountings



Tenon Mount Catalog #SSL-TM

Use with trunnion or yoke mount when mounting on 2-3/8" tenon mount.



Cross Arm Mount

Use with trunnion or yoke mount to mount to wood or steel crossarms.



55°, 65° Ambient Rated



LISTED FOR WET LOCATIONS
CONSULT FACTORY FOR CUL AVAILABILITY

I.E.S. photometrics available by e-mail or on disk

To build catalog numbers refer to inside front cover

Sports Floodlight Order Information

Housing Size (sq.)	Wattage Lamp	Catalog Number (add mounting code)
21"	1000W MH	SSF0499-(a)(b)
	1500W MH	SSF0495-(a)(b)
	1000W HPS	SSF0599-(a)(b)

(a) Voltage Suffix Key: Indicate voltage in space (a)

Description	
480 Volt	Multi-tap
5	M
120/208/240/277V	




(b) Options: Indicate options in space (b) (Factory Installed)

Description	SUFFIX (b)
NEMA Type (Must Follow The Voltage (a) In The Order code)	
3 X 3	3
5 X 5	5
6 X 6	6
Fusing	
Single	F
Dual	J

Accessories:

Description	Catalog Number
Glare Shield	SSF-GS
Tenon Mount	RSY4
Two Light Cross Arm Mount	S2-T2-WPG
Three Light Cross Arm Mount	S3-T3-WPGM
Four Light Cross Arm Mount	S4-T4-WPG

Mountings

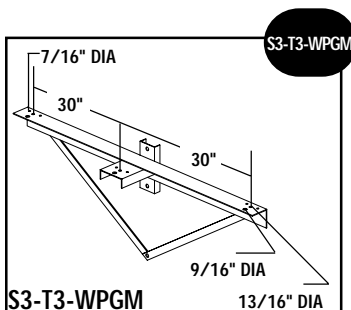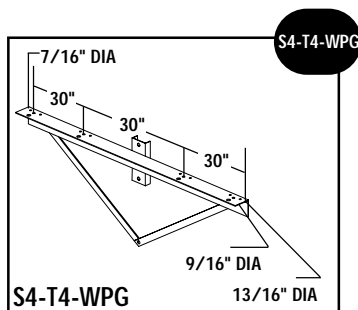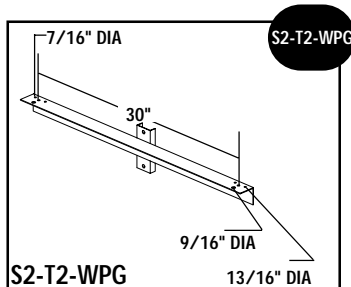


SSF Series - Sports Floodlight

Wattage Range:
1000-1500W



Dimensions	Fixture Length	Fixture Width	Ballast Length	Approx. Ship Wt.
SSF Series	33.5"	21"	13.25"	40-60 LBS.

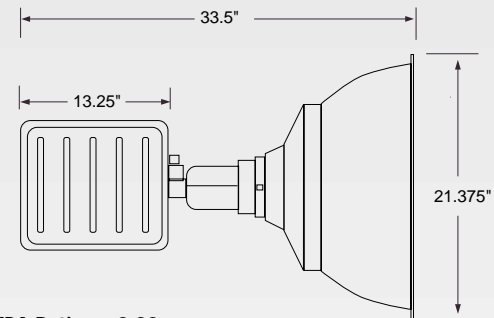

EPA Rating – 2.39

Housing

The die cast aluminum housing is fully perimeter gasketed for environmental protection of electrical components. Each fixture is polyester powder coated – bronze is standard.

Optics

The reflectors are spun aluminum precision reflectors with contours for high illumination performance.

Lens

Polished, tempered safety glass.

Lamps

The SSF Series is available with a 1000W Metal Halide, 1000W High Pressure Sodium lamp or a 1500W Metal Halide lamp.

Mounting

A 5/8" bolt for direct steel cross arm mount is standard. A tenon adaptor is available for pole mounting. A selection of cross arm mounts are also available.

Optional Aiming Scales with Sights

Each installation is easily adaptable for individual lighting preferences with the aiming options.

Warranty

The SSF Sports Flood sold by C.E.W. Lighting, Inc., unless otherwise specified, will be warranted to be free of defects in materials and workmanship under normal use and service for a period of five (5) years from date of shipment. If found to be defective by us, we will replace the non-performing components.